


**SOLENOID PUMPS**

**EKS17**

**TECHNICAL DATA**



**DIMENSIONS**

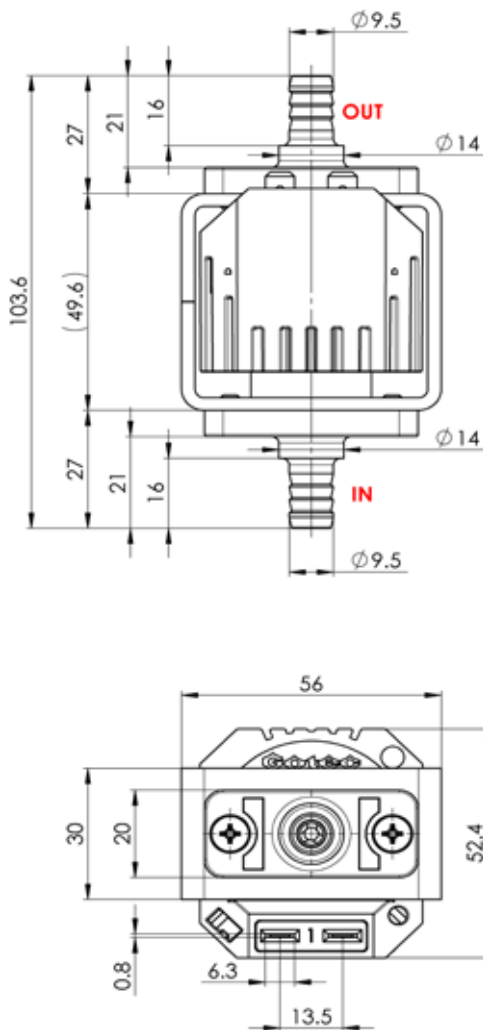

**NOMINAL RATED DATA**

Max. pressure	1.9[bar]
Max. flow rate	120[l/h]
Max. suction height	3[m]
Viscosity range	1..600[mm <sup>2</sup> /s]
Filter	Mesh 100
Tension	230[V] (24, 110V)
Frequency	50, 60[Hz]
Electrical connection	2 x 6.3 x 0.8 [mm]
Power	40[W]
Weight	~430[g]
Temperature	1..50[°C]
Insulation	Classe H Classe 2
	100% ED / 20 [°C]


**SOLENOID PUMPS**

**EKS17 230V**




**TECHNICAL DATA**

**PERFORMANCES**

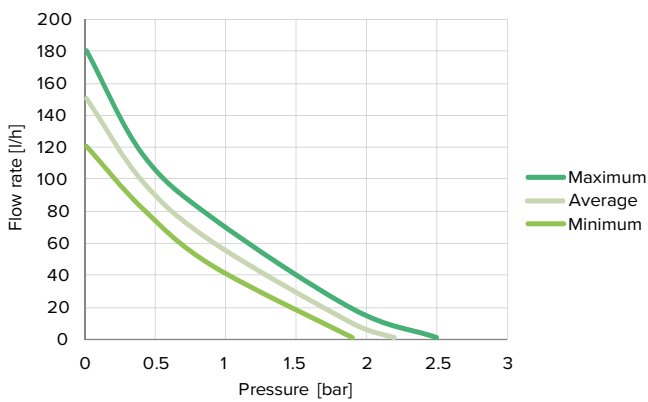

**FLOW RATE & TEMPERATURE**

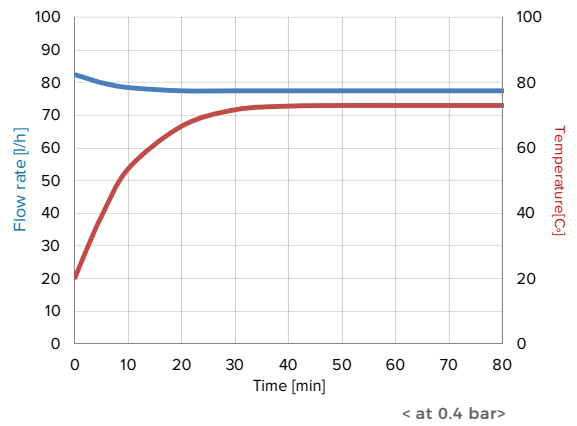

Tested with 20°C of water at ambient temperature

**ACCESSORIES**




Cable with a diode

Thermal security

Large choice of materials & options

**ELECTRIC WIRING DIAGRAM**

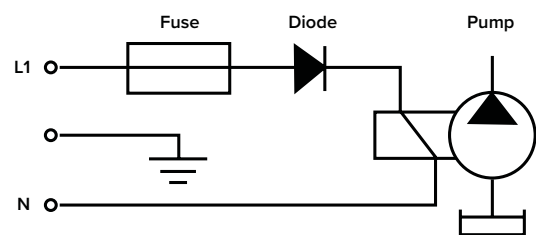

Please refer to instruction manual for more installation details. For more information, visit our website : [www.gotec.ch](http://www.gotec.ch)

**Certifications**




SOLENOID PUMPS

# EKS17 24VAC




TECHNICAL DATA

## PERFORMANCES

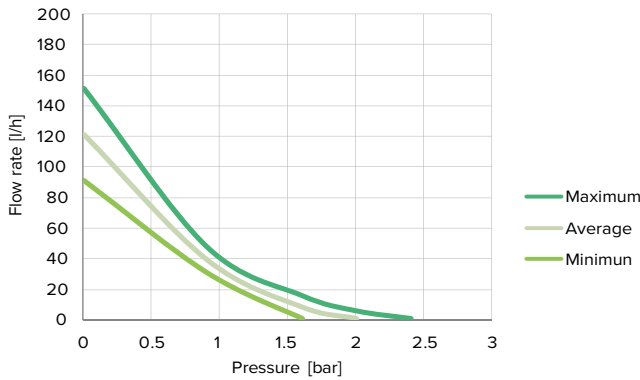

## FLOW RATE & TEMPERATURE

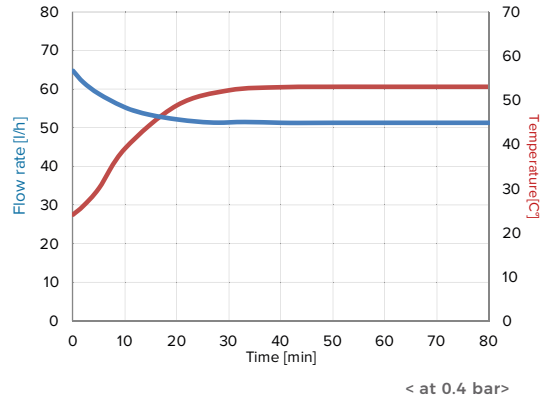

Tested with 20°C of water at ambient temperature

## ACCESSORIES




Cable with a diode

Thermal security

Large choice of materials & options

## ELECTRIC WIRING DIAGRAM

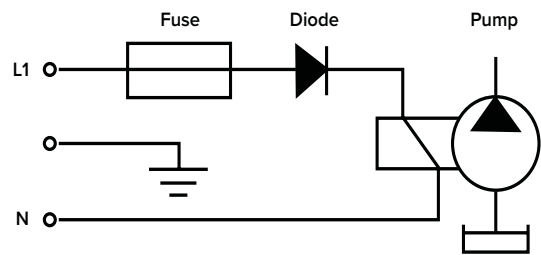

Please refer to instruction manual for more installation details. For more information, visit our website : [www.gotec.ch](http://www.gotec.ch)

Certifications

