

Valve terminal systems → Valve terminal systems

5/2-way valve, Series HF03, HF03-LG, CL03, CL03-XL

► Qn = 850 l/min ► plate connection ► Manual override: with detent ► single solenoid, double solenoid



00138485

Certificates	UR (Underwriters Laboratories)
Version	Spool valve, zero overlap
Pilot	external, internal
Sealing principle	soft sealing
Blocking principle	Single base plate principle
Working pressure min./max.	-0.9 bar / 10 bar
Control pressure min./max.	2.5 bar / 10 bar
Ambient temperature min./max.	+0 °C / +50 °C
Medium temperature min./max.	+0 °C / +50 °C
Medium	Compressed air
Max. particle size	5 µm
Oil content of compressed air	0 mg/m ³ - 5 mg/m ³
Protection class with electrical connector/plug	IP 65
Protective circuit	Z-diode Protected against polarity reversal
Status display LED	Yellow
Duty cycle	100 %
Generic emission standard in accordance with	EN 50081-1
Generic immunity standard in accordance with	EN 50082-2
Mounting screw	cross recessed DIN EN ISO 4757-Z1
mounting screw tightening torque	1.3 Nm
Materials:	
Housing	Polyamide, fiber-glass reinforced
Seals	Acrylonitrile Butadiene Rubber

Technical Remarks







- The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C.
- The oil content of air pressure must remain constant during the life cycle.
- Use only the approved oils from Bosch Rexroth, see chapter „Technical information“.
- The pilot type (external/internal) is not implemented in the valve, but in the end plate of the valve terminal system.
- The UR certification refers to the pilot valve.

Operating voltage	Voltage tolerance	Power consumption
DC	DC	DC
		W
24 V	-15% / +20%	0.35

Valve terminal systems → Valve terminal systems

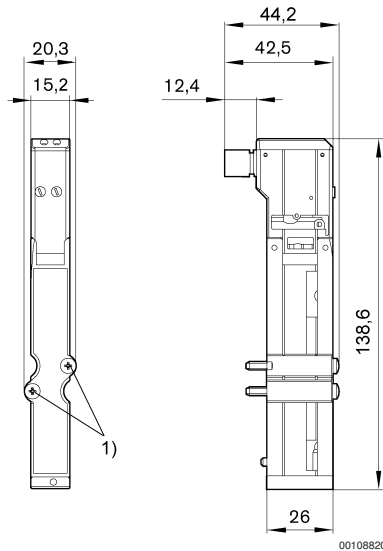
5/2-way valve, Series HF03, HF03-LG, CL03, CL03-XL

► Qn = 850 l/min ► plate connection ► Manual override: with detent ► single solenoid, double solenoid

	MO	Operating voltage	Flow conductance		Flow rate value	Switch-on time	Switch-off time	Weight	Part No.
			b	C	Qn				
					[l/(s*bar)]	[l/min]	[ms]		
		24 V	0.22	179	850	16	23	0.082	0820055051
		24 V	0.22	178	850	13	15	0.082	0820055501
		24 V	0.22	179	850	15	23	0.082	0820055001

MO = Manual override

With collective pilot air exhaust

Nominal flow Qn at 6 bar and $\Delta p = 1$ bar**Dimensions**

00108820

1) Mounting screw: X-slot DIN EN ISO 4757-Z1
tightening torque for mounting screw [Nm]: 1.3